


WG202

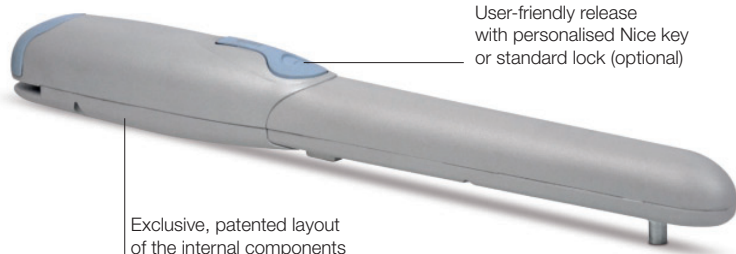

User-friendly release with personalised Nice key or standard lock (optional)

Exclusive, patented layout of the internal components

For swing gates with leafs up to 2 m, surface mounted.

24 Vdc electromechanical gear motor.

Compatible for operation with Solemyo system.

Patented layout of the internal components: fewer moving parts **means greater reliability and quiet operation.**

Easy to install: after the gear motor has been assembled, all electrical connections are made from above.

User-friendly release with personalised Nice key or standard lock (optional).

Pre-assembled, travel stops PLA13 on opening.


New Moonclever control unit MC424L:

- simple programming, by means of a single key;
- clutch with anti-crush safety feature;
- automatic memorization of limit switches on opening and closing with self-learning function;
- programming of pause time;
- pedestrian pass door;
- deceleration on opening and closing;
- obstacle detection system;
- can be linked to the 8.2 KOhm resistive sensitive edge;
- continues to work even during power failures using optional (PS124) batteries that fit inside the control unit.

FLO2RE (included in kit) x 2



MC424L (Included)



MOF (optional)



MOSE (optional)




ML24T (optional)



PLA13 (optional) TS



WG2024 2 surface-mounted electromechanical gear motors, with Nice key release.
FLO2RE 2 transmitter 433.92 MHz, 2 channels. **MC424L** 1 control unit with SMXI plug-in receiver.
MOF 1 pair of photocells for outdoor installation. **MOSE** 1 key selector switch for outdoor installation.
ML24T 1 flashing light with integrated aerial. **PLA13** 2 travel stops for opening manoeuvres.
TS 1 signboard.

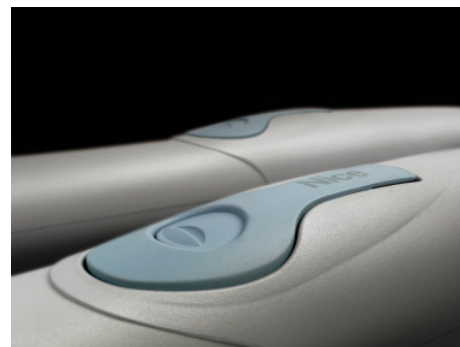

Code	Description
WINGO2024	Kit for swing gates with leafs up to 2 m, 24 Vdc, surface mounted

N.B. The content of the package may vary: consult the retailer .

Technical specifications

Code	WG4024
Electrical data	
Power supply (Vdc)	24
Absorption (A)	3.5
Power (W)	85
Performance data	
Speed (m/s)	0.018
Force (N)	1500
Work cycle (cycles/hour)	30
Dimensional and general data	
Protection level (IP)	44
Working temp. (°C Min/Max)	-20 ÷ +50
Dimensions (mm)	770x98x95 h
Weight (kg)	17

Utilisation limits

