

Programming display

Main functions

Entering of access password	Opening speed adjustment
Closing speed adjustment	Anti break-in function management
Pause times adjustment	Anti-crushing adjustment
Diagnostic display	Weekly calendar management

Management of interlock with or without memory
 Selection of battery operation logics
 Configuration of 1 output on the control unit
 Configuration of 2 emergency inputs on the control unit
 Display of number of cycles carried out
 Management of 5 daily time slots



Programming display

SD KEEPER functions keyboard

Main functions

Manual	Open
Automatic	Partial opening
One way	Night
Reset	One way, partial

Throubleshooting through a combination of flashing LEDs
 Operation can be disabled by a jumper or a combination of keys
 Preset for programming display



SD Keeper functions keyboard

SDK light

Available programs


Manual	Open
Automatic	Partial opening
One way	Night
Reset	

Throubleshooting through a combination of flashing LEDs
 Operation can be disabled by a combination of keys
 Not preset for programming display



SDK light functions keyboard

Small section profile TK20

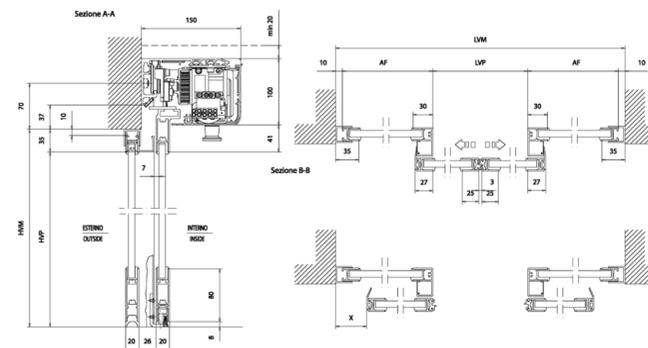

HEADQUARTERS

FAAC spa
 Via Calari 10 - 40069 Zola Predosa (BO) ITALY
 Tel. +39 051 61724 - Fax +39 051 758518
 info@faac.it - www.faacgroup.com

FAAC SUBSIDIARIES

FAAC AG
 Tel. +41 41 8713440
 Fax +41 41 8713484
 Altdorf, Switzerland
 www.faac.ch

FAAC FRANCE
 Tel. +33 4 72218700
 Fax +33 4 72218701
 Corbas, France
 www.faac.fr

FAAC GMBH
 Tel. +49 8654 49810
 Fax +49 8654 498125
 Freilassing, Germany
 www.faac.de

FAAC MIDDLE EAST BRANCH
 Tel. +971 42146733
 Fax +971 42146734
 Dubai Airport Free Zone, UAE
 www.faac.ae

F.A.A.C. SA
 Tel. +34 91 6613112
 Fax +34 91 6610050
 Madrid, España
 www.faac.es

FAAC UK LTD.
 Tel. +44 1256 318100
 Fax +44 1256 318101
 Basingstoke Hampshire, UK
 www.faac.co.uk

FAAC AUSTRALIA PTY LTD
 Tel. +61 2 87565644
 Fax +61 2 87565677
 Homebush – Sydney, Australia
 www.faac.com.au

FAAC NORD
 Tel. +33 1 69191620
 Fax +33 1 69191621
 Massy, France
 www.faac.fr

FAAC INDIA PVT. LTD
 Tel. +91 120 3934100/4199
 Fax +91 120 4212132
 Noida – Delhi, India
 www.faacindia.com

FAAC POLSKA SP.ZO.O.
 Tel. +48 22 8141125
 Fax +48 22 8142024
 Warszawa, Polska
 www.faac.pl

F.A.A.C. SA Delegación Cataluña
 Tel. +34 93 4362000
 Fax +34 93 4368225
 Barcelona, España
 www.faac.es

FAAC BENELUX
 Tel. +32 50 320202
 Fax +32 50 320242
 Brugge, Belgium
 www.faacbenelux.com

FAAC G.E.S. M.B.H.
 Tel. +43 662 8533950
 Fax +43 662 85339520
 Wals – Siezenheim, Austria
 www.faac.at

FAAC INTERNATIONAL INC.
 Tel. +1 307 6351991
 Fax +1 307 6328148
 Cheyenne, USA
 www.faacusa.com

FAAC SCANDINAVIA AB
 Tel. +46 36 376860
 Fax +46 36 370780
 Bankeryd, Sweden
 www.faac.se

FAAC SHANGHAI
 Tel. +86 21 68182970
 Fax +86 21 68182968
 Shanghai, China
 www.faac.com.cn

908462004 - Rev. 13 - 500 - Zucchini - 09/2009. The descriptions and illustrations contained in the present brochure are not binding. FAAC reserves the right to undertake product technical modifications without prior notice.



A100 COMPACT
 Automations for sliding doors

Automations for sliding doors

single leaf, two leaves with continuous duty

Thin and elegant

Thanks to their compact dimensions, FAAC A100 COMPACT automations can be adapted to every type of architectural environment, even in limited space conditions. All the most innovative technical features in just a few centimetres. For the utmost versatility of use, the A100 COMPACT Series can be adapted to sliding doors with single leaves and a maximum weight of 110 kg or with double leaves and a maximum weight of 70 kg each leaf. An A100 COMPACT automation also guarantees considerable energy savings as regards air-conditioning and the total removal of architectural barriers.

Reliable and always sliding

Designed to operate at best on each occasion and in every environment, A100 COMPACT automations are automatically reliable, without limits on the frequency of use. In the event of a power cut, buffer batteries (optional) with charge control guarantee 100% operation for thirty minutes.


Excellent logics in real time

A microprocessor verifies in real time all door activities and guarantees an intelligent control. The operation logics can be selected by means of a functions keypad.

Absolute safety

The A100 COMPACT Series automatically programs opening and closing force and speed according to the friction and the door weight in conformity with the relevant international safety standards. In case of an obstacle the door reopens immediately. On the next closing it verifies at slow speed if the obstacle is still present.

thinner than ever

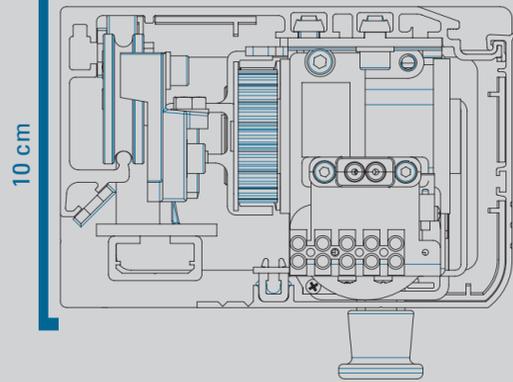

1 Motor with electrical lock





- 1 Motor with electrical lock
- 2 Control unit with switching power supply unit
- 3 Drive trolleys
- 4 Knob for manual release
- 5 "Parachute" device of front housing
- 6 Eyelets for a fast mechanical installation

Accessories

- Round photocell
- Infra-red passive sensor
- Microwave radar
- Keyswitches with emergency release devices
- Profiles for glass leaf fitting
- Electro-mechanical motor lock with manual release
- Motor lock monitoring
- Emergency batteries. They guarantee the automated system to operate for 30 minutes on continuous use**
- Break-out anti-panic kit**
- Compatible with the new series of FAAC TK20 and TK50 profiles**

3 Drive trolleys

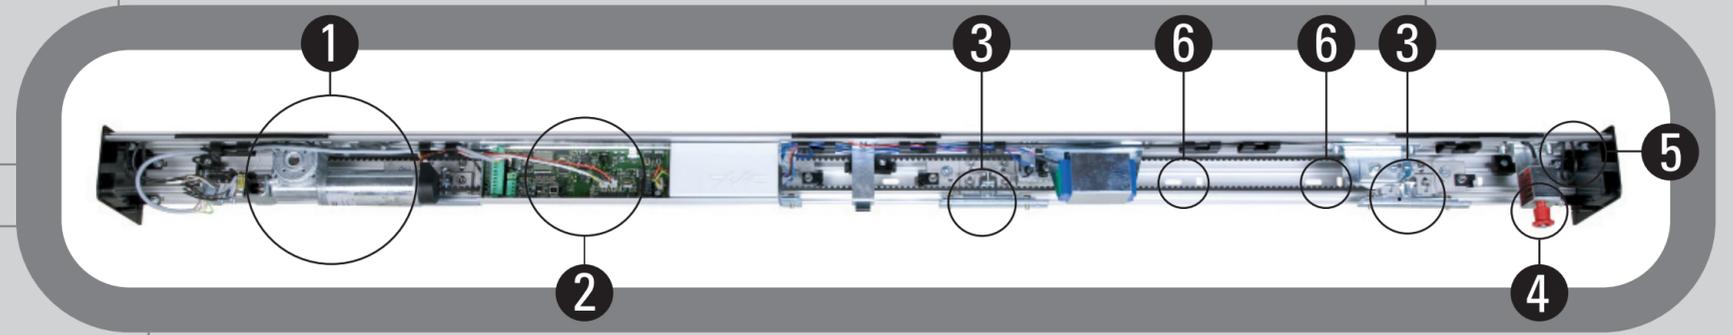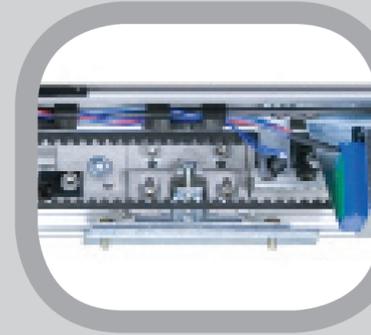


2 Control unit



Time slot programmable
calendar management



4 Knob for manual release

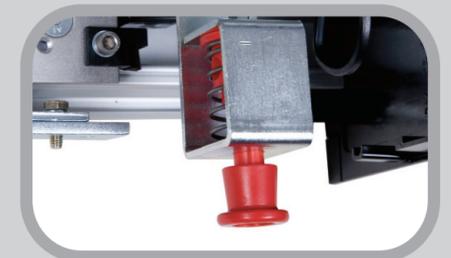

Technical specifications

- Electric power supply
- Power consumption
- Frequency of use
- Drive unit
- Head profile length
- Load free opening adjustment
- Load free closing adjustment
- Partial opening adjustment
- Pause time adjustment
- Night pause time adjustment
- Anti-crushing device
- Photocells fail-safe
- Protection class
- Environmental temperature

A100 Compact

- 115/230 V ac - 50 (60) Hz
- 100 W
- 100%
- 24 V dc motor with encoder
- VP x 2 + 100 mm
- 5 ÷ 70 cm/s
- 5 ÷ 70 cm/s
- 10% ÷ 90% of total opening
- 0 ÷ 30 s
- 0 ÷ 240 s
- standard
- standard (can be excluded)
- IP 23 (for indoor use only)
- 20°C ÷ +55°C

Use

Model	Leaf	Free passage width (mm)	Leaf max. weight (kg)
A100 COMPACT 1	single	700÷3000	110
A100 COMPACT 2	double	800÷3000	70+70

